

Electrical specifications

Technology	Ceramic (PCB)	
Frequency (f_0)	5.7	[GHz]
Bandwidth	6	[GHz]
Insertion Loss	≤ 1.4	[dB]
Return Loss	≤ -10	[dB]
Rejected band (f_L)	[DC – 2.1]	[GHz]
Rejection (Low)	-30	[dB]
Rejected band (f_H)	[9.2 – 11]	[GHz]
Rejection (High)	-15	[dB]
Impedance	50	[Ω]
Connector	–	–



Physical specifications

W x L x H	8 x 18 x 0.635	[mm ³]
Weight	–	[g]

Technical Drawing

Data Not Available


elliptika




Bandpass Filter

2.7 – 8.7 GHz

In Band Response

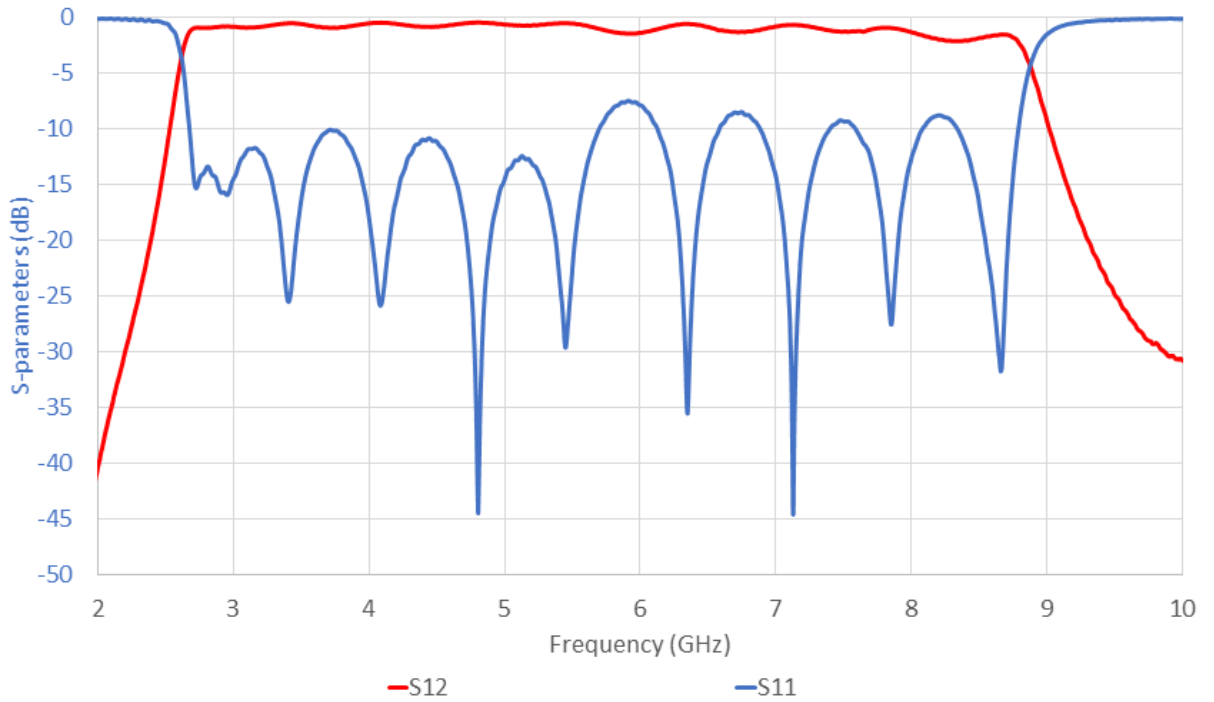

Out Of Band Response

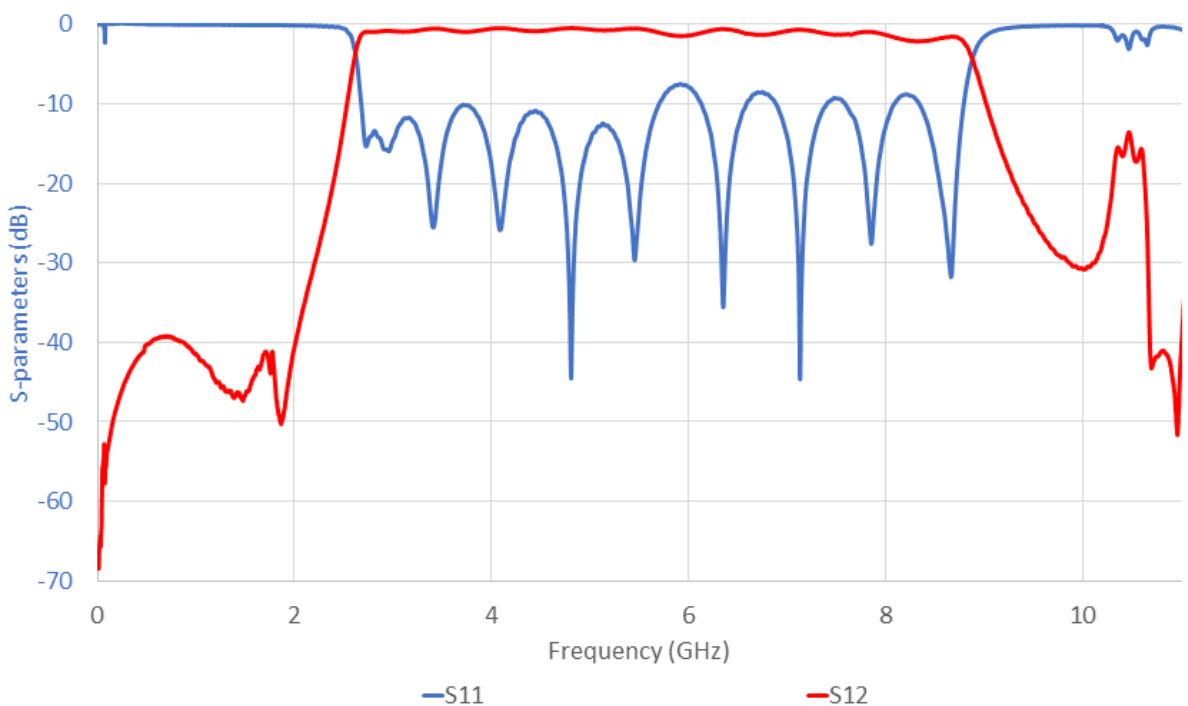

Filter

www.elliptika.com
 Tel : 02 98 02 03 40
 Contact@elliptika.com