


Electrical specifications

| Technology | PCB | |
|-------------------------|---------------|--------------|
| Frequency (f_0) | 4.95 | [GHz] |
| Bandwidth | 500 | [MHz] |
| Insertion Loss | ≤ 3 | [dB] |
| Return Loss | ≤ -15 | [dB] |
| Rejected band (f_L) | [DC – 4.3] | [GHz] |
| Rejection (Low) | -47 | [dB] |
| Rejected band (f_H) | [5.36 – 18.4] | [GHz] |
| Rejection (High) | -25 | [dB] |
| Impedance | 50 | [Ω] |
| Connector | – | – |

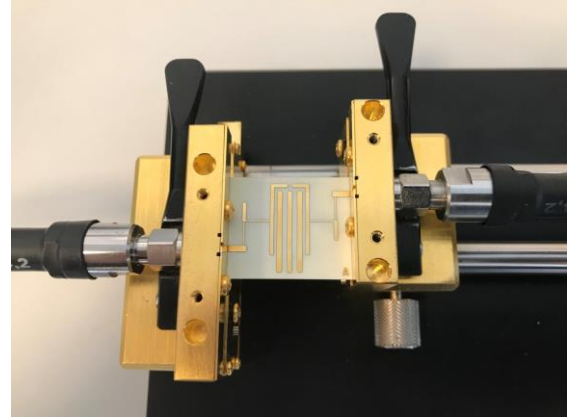

Physical specifications

| | | |
|-----------|-----------------|--------------------|
| W x L x H | 26 x 21 x 0.508 | [mm ³] |
| Weight | – | [g] |


Technical Drawing

Data Not

Available

elliptika

In Band Response

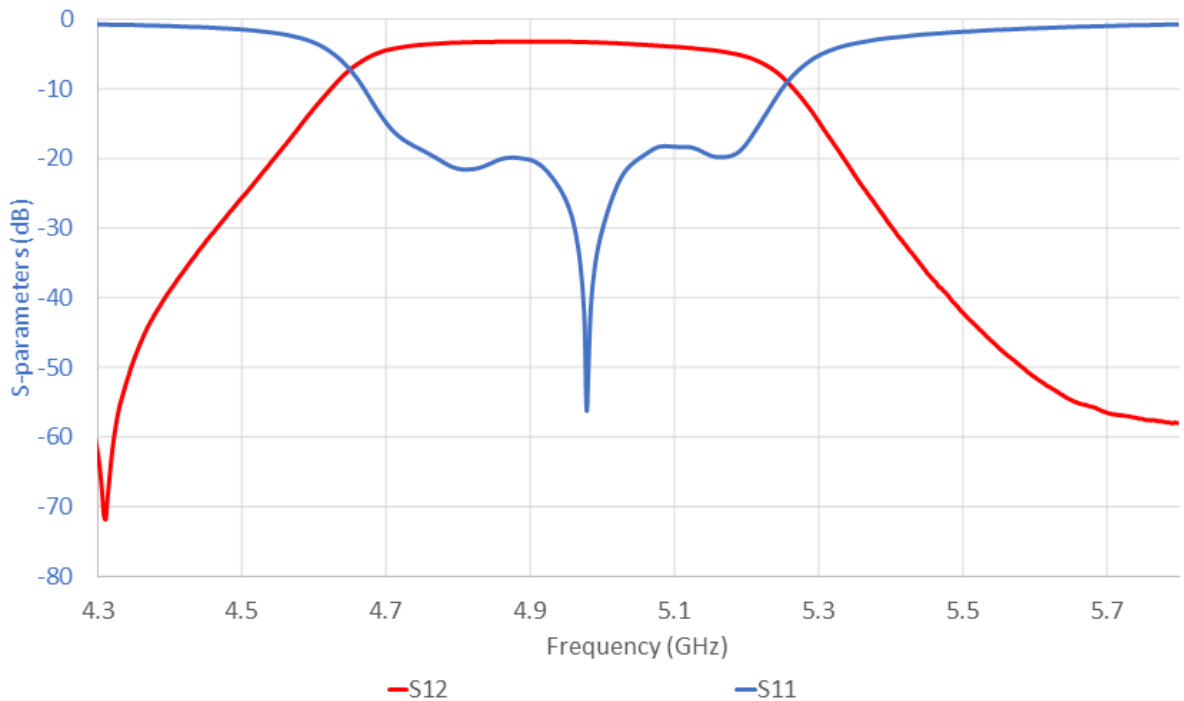

Out Of Band Response

