

Electrical specifications

Technology	<i>Machined</i>	
Frequency (f_0)	390	[MHz]
Bandwidth	20	[MHz]
Insertion Loss	≤ 0.84	[dB]
Return Loss	≤ -15	[dB]
Rejected band (f_L)	[DC – 300]	[MHz]
Rejection (Low)	-60	[dB]
Rejected band (f_H)	[500 – 2000]	[MHz]
Rejection (High)	-60	[dB]
Impedance	50	[Ω]
Connector	SMA – F	–



Physical specifications


W x L x H	71 x 50 x 68	[mm ³]
Weight	–	[g]

Technical Drawing

Data Not Available

elliptika

In Band Response

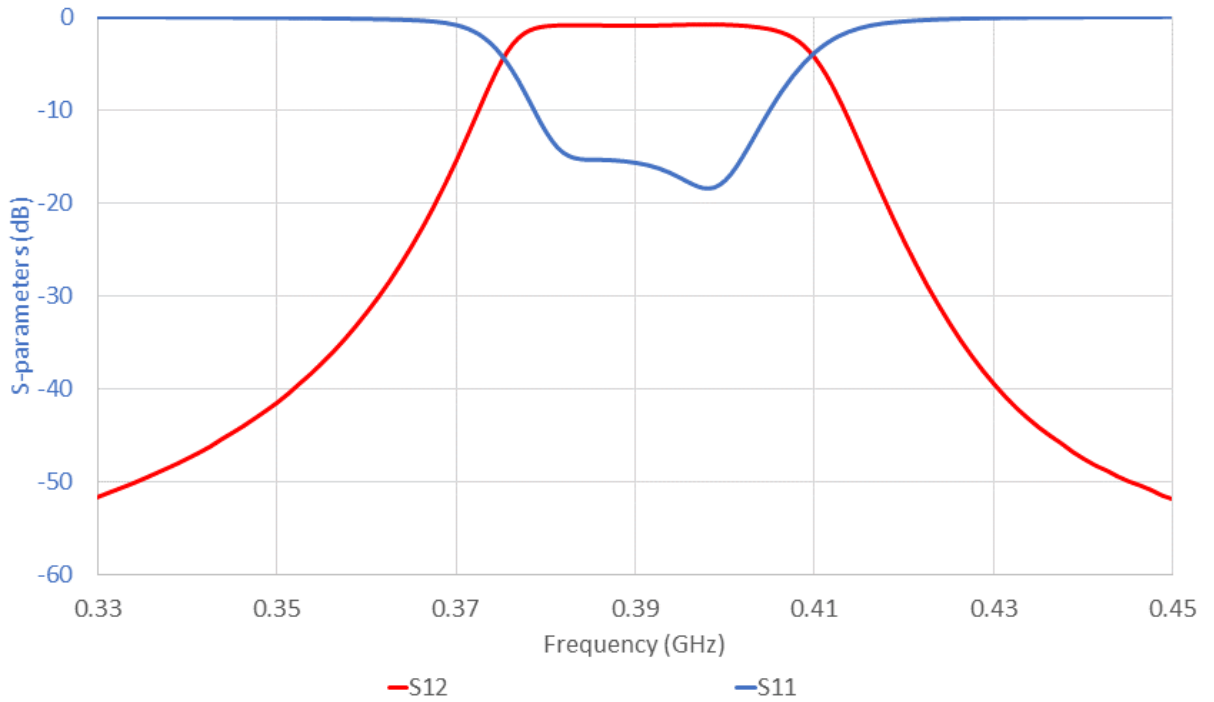

Out Of Band Response

