

Waveguide to coaxial transition 22-33 GHz


Description

This Waveguide to coaxial transition operates for a frequency of 22 GHz to 33 GHz. It respects the flange standard. The particularity of this Waveguide to coaxial transition is its lightness. Indeed, this Waveguide to coaxial transition is lighter than a machining one due to the realization by a 3D printer.

Technical specifications

Frequency (GHz)	22-33
Insertion Loss max (dB)	0.4
VSWR max	1.8
Connector	SMA-F
Waveguide	WR34
Size (mm)	21.1*21.1*29
Weight	?

Dimensional Drawing

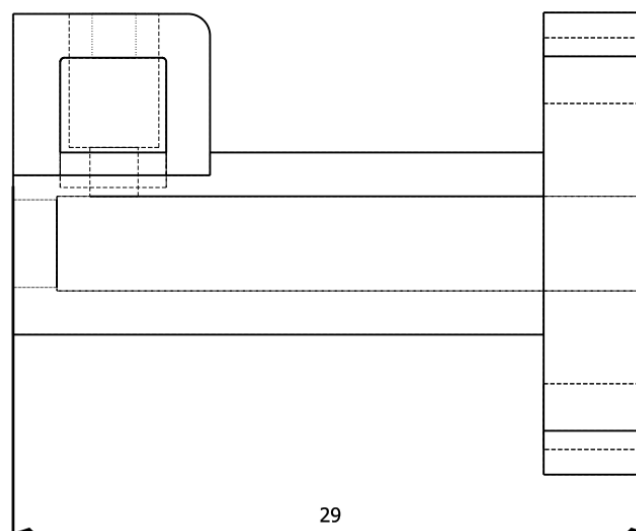

Waveguide to coaxial transition 22-33 GHz

