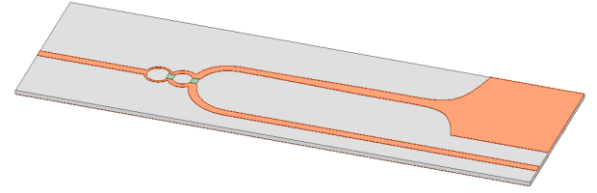


Electrical specifications

Frequency Range	8 – 18	[GHz]
Return Loss	≤ -10	[dB]
Insertion Loss	≤ 1.2	[dB]
Phase Shift	180	[Deg]
Phase balance	± 5	[Deg]
Amplitude balance	± 0.6	[dB]
Isolation	≥ 10	[dB]
Impedance	50	[Ω]
Connector	SMA – F	–
Power (CW)	–	[W]
Power (Impulse)	–	[W]


Physical specifications

W x L x H	77 x 22 x 0.508	[mm ³]
Weight	–	[g]


Technical Drawing

Data Not


Available

elliptika


Return Loss

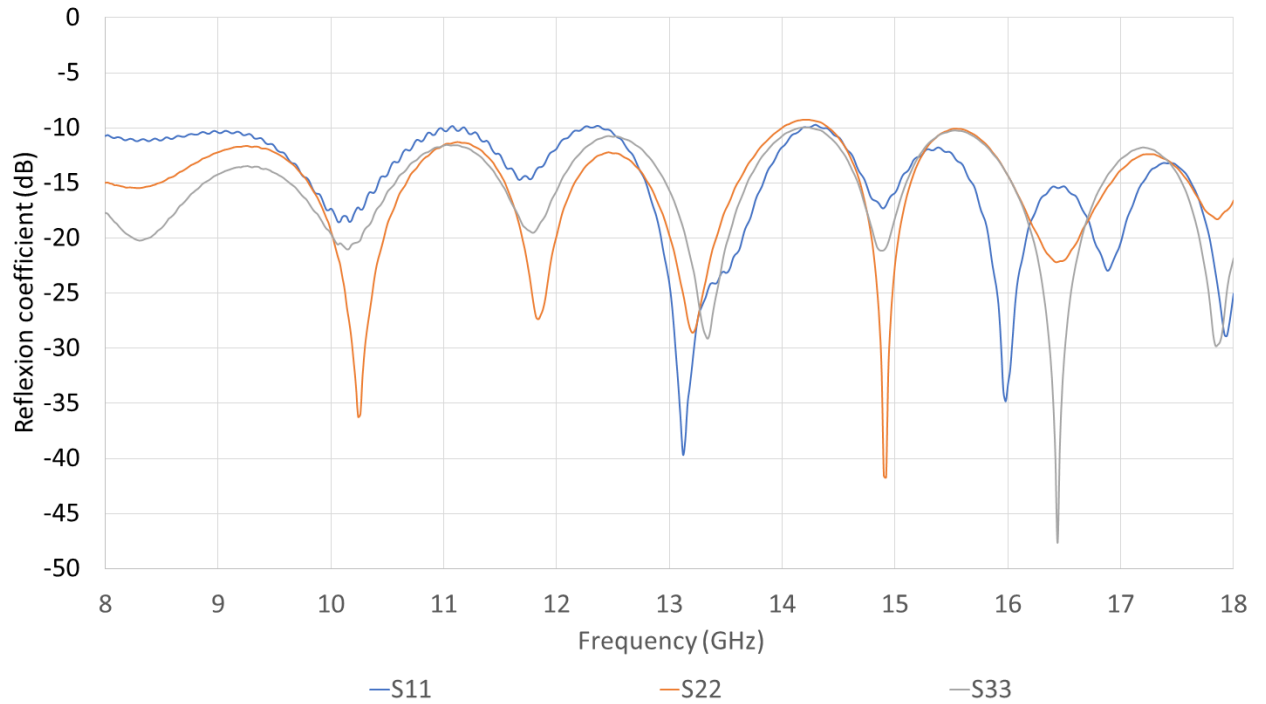

Insertion Loss

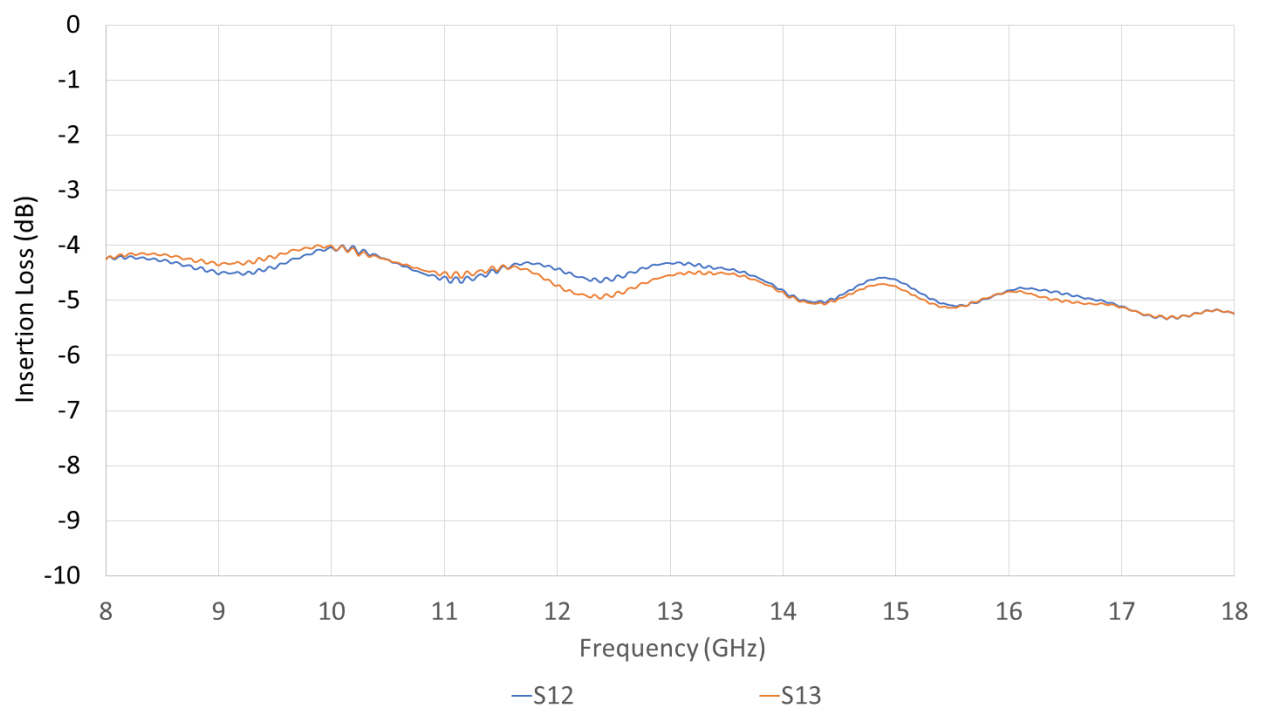

Phase Shift

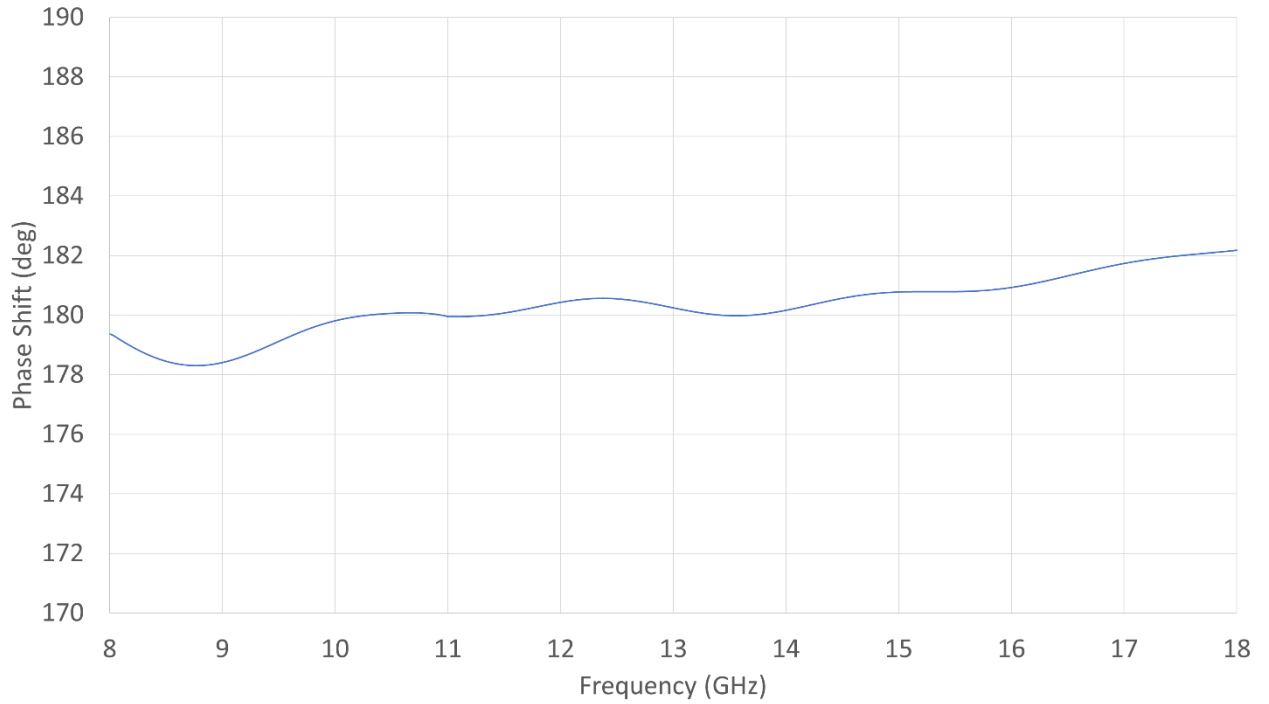

Isolation

